


KYB 自吸滑板泵 Self-Priming Vane Pump

特征

- 用于柴油、煤油、汽油、苯等干净、轻质油品
- 滑片泵，输入功率小，大流量
- 铸铁泵体，全铜滑片，动力可选配防爆电机或柴油机
- 内置溢流阀、过滤网
- 进出口用快速接头连接
- 最高传输液体温度可达150℃
- 可长时间连续工作
- 超强自吸能力，工作前不必向泵内灌入油液
- 滑轮拖车设计，使用方便，易操作，易维护

Feature

- For diesel oil , Kerosene, gasoline, benzene and other clean, light oily liquid
- Vane pump , large output with small power input
- Cast iron pump casing, completely bronze vanes, electric motor or diesel engine driven for option
- Bypass valve built in, with inner fitter
- Quick coupling connection on inlet/outlet side
- Max liquid temperature up to 150℃
- Continuous working
- Strong self-priming.It's not necessary to pour oil before pump working
- Trailer type design,moveable easy to use and maintenance

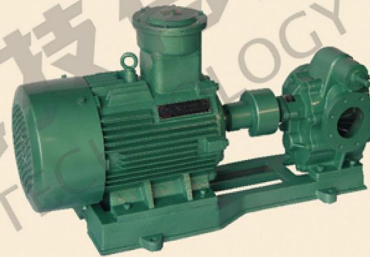

性能参数 Technical Specification

型号 Model	口径 Size(mm)	流量 Flow(m³/min)	扬程 Head(m)	吸程 Suction(m)	功率 Power(Kw)	转速 Speed(rpm)	电压 Voltage(V)
KYB25-7-30	25	7	30	7	0.75	1450	220/380
KYB40-20-30	40	20	30	7	2.2	1450	380/440
KYB50-25-25	50	25	25	7	2.2	1450	380/440
KYB65-32-25	65	32	25	7	4	1450	380/440
KYB80-35-25	80	35	25	7	4	1450	380/440